

DDM 12/12**M7A2 3F 4P 2V +SCT****Technical Data**

DDM 12/12 M7A2	Speed control	Curve s	Nominal motor power W	Poles -	Phases	Connection	Mains frequency Hz	Max. power consumption W	Max. current consumption A	Speed 1/min
3F 4P 2V +SCT	(2)/(3)	[P1]	2200	4	3~	Δ/Y	50	5780	9.7	1400

Technical Data

DDM 12/12 M7A2	Operating Capacitor μF	Nominal capacitor voltage V	Motor protection class	Motor thermal class	Thermal protection	Media Temperature max. °C	Fan weight kg	Density of media kg/m³	Installation type (ISO 5801) number	Article number
3F 4P 2V +SCT			IP54	F	EXT	40	59	1.2	B	6M02123

(1) = Speed controllable via Transformer

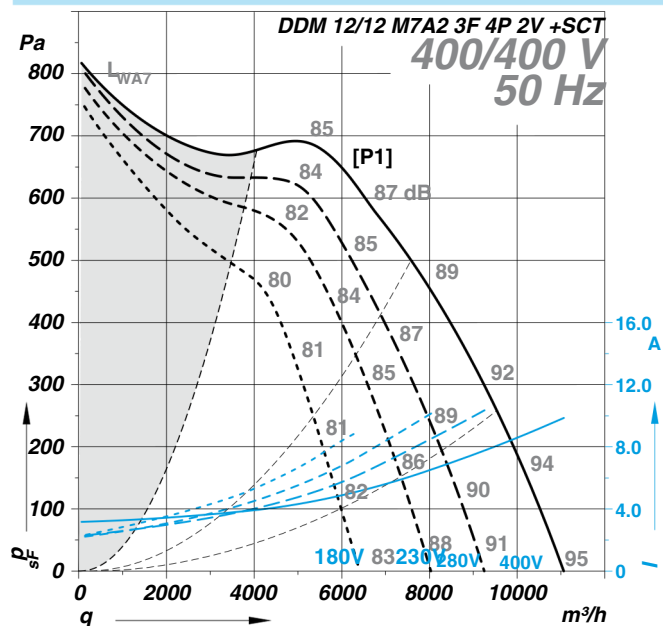
(2) = Speed controllable via TRIAC or Transformer

(3) = Speed controllable via Inverter

* = No speed control available

[HI] High speed, [ME] Medium speed, [LO] Low speed

Attention! We suggest to do not use the fan in the grey marked area! The noise ratings given in the performance curves are sound power level LWA7, see „Technical Description“.

Curves**Dimensions** in mm, Subject to change.**DDM 12/12 M7A2 3F 4P 2V +SCT**