

Carbune activ - alumina activa- Cartuse FCC

Cod: FCC

Cartuse: Carcasa tabla galvanizata cu sistem de fixare tip baioneta

Rama suport : Tabla galvanizata cu grosime de 1.5mm



FCC-AC (Cartus cu carbune activ)

Deodorizare si purificare a aerului incarcat cu gaze toxice (ca: HCl, HF, NOx si SO2) in bucatarii , vopsitorii, parcari, laboratoare ,spatii de productie , muzee, spitale etc.

• FCC-AC (MA PLUS) (Cartus cu carbune activ si alumina)

Deodorizare si purificare a aerului incarcat cu gaze toxice (ca: HC<S, SOx, NOx, CH2O, H2S, NH3, VOCS, clor) in parcari , bucatarii , fumoare , adaposturi de animale , spatii de productie

Cod : FCC

Material filtrant	Carbune activ – Alumina activa
Max. temperatura	70°C
Max. umiditate R.H	70%
Viteza maxima recomandata	2,53 m/sec


Cartuse

Model	Diametru	Lungime	Grosime	Volum	Viteza recomandata Debit aer (1.86 m/sec)	Pierdere de presiune
	mm	mm	mm	l	m ³ /h	Pa
FCC-AC	145	450	26	4.3	125	75
FCC-AC MA PLUS	145	450	26	4.3	125	75


Model	Diametru	Lungime	Grosime	Volum	Debit de aer(2.23 m/sec)	Pierdere de presiune
FCC-AC	145	450	26	4.3	156	125
FCC-AC MA PLUS	145	450	26	4.3	156	125

Baza

Model	Dimensiuni	Adancime	Numar cartuse
	mm	mm	
FCB-4	305 x 305	65	4
FCB-8	305 x 610	65	8
FCB-12	508 x 610	65	12
FCB-16	610 x 610	65	16

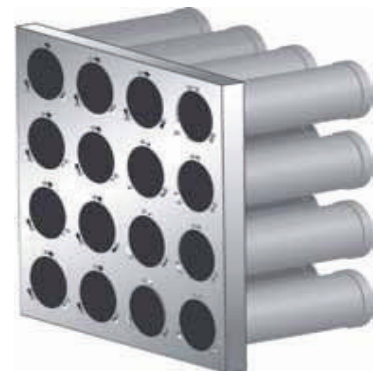

MODUL DE FILTRARE UF_M 6 - CARB 4000

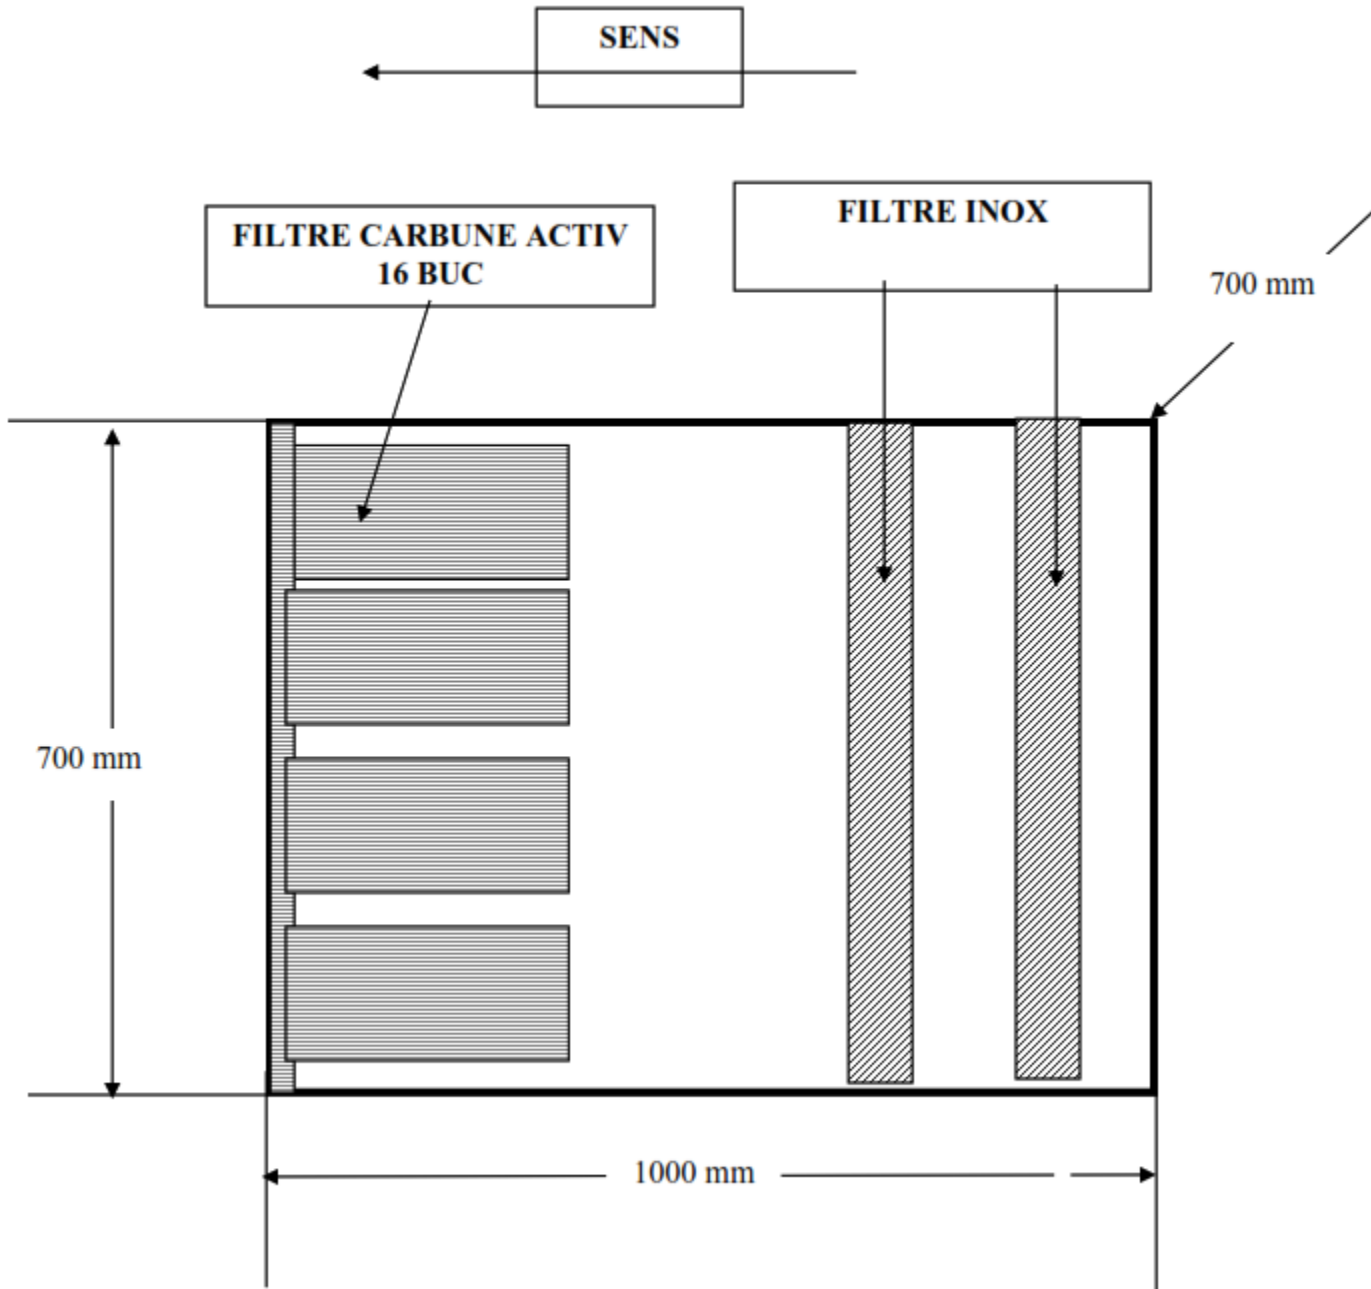

Include :

FCB - 16

Debit de aer maxim : 4000 m³/h
Pierdere de presiune : 350 Pa
Nr cartuse : 16 buc



Prefiltru lavabile FLAE - 2 buc

Filtru caseta clasa G2
Temperatura maxima de functionare: 200°C.

R.H. :100%

Dimensiuni : 500 x 500 x 30 mm.


Debit aer: 1800 mc/h.

Pierdere de presiune : 28 Pa

Rama din inox , grosime 0,6 mm



MODUL DE FILTRARE UF_M 6 - CARB 3000

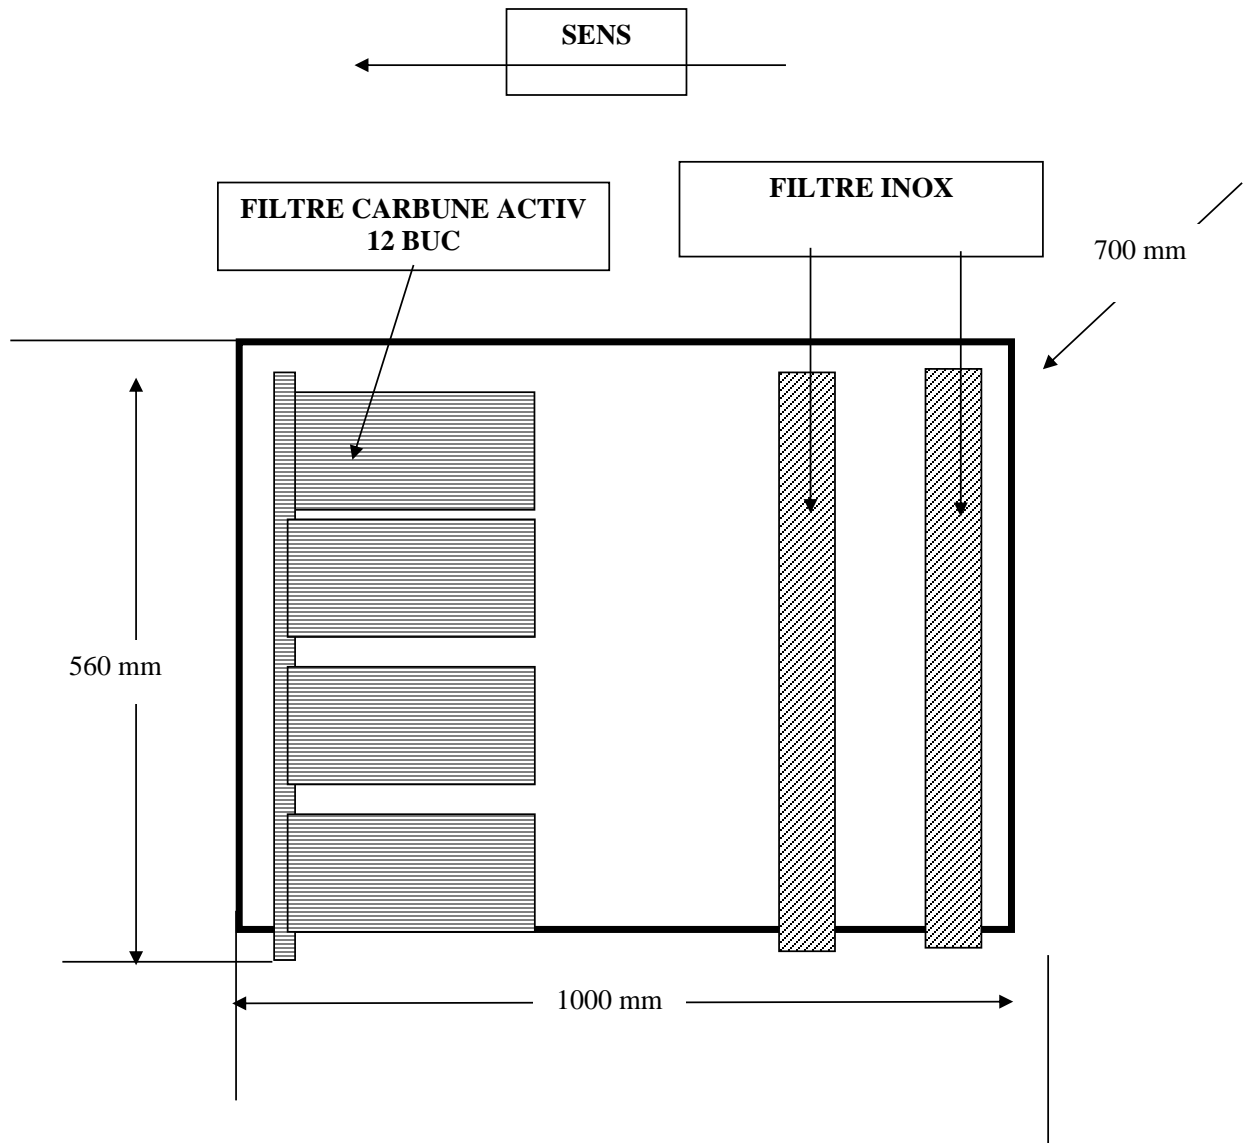

Include :

FCB - 12

Debit de aer maxim : 3000 m³/h

Pierdere de presiune : 330 Pa

Nr cartuse : 12 buc

Prefiltru lavabile FLAE - 2 buc

Filtru caseta clasa G2

Temperatura maxima de functionare: 200°C.

R.H. :100%

Dimensiuni : 500 x 500 x 30 mm.

Debit aer: 1800 mc/h.

Pierdere de presiune : 28 Pa

Rama din inox , grosime 0,6 mm

